




ACCESSORIES

THE FINAL TOUCH TO YOUR
MIKASA FLOOR.

No floor is complete without
matching accessories to cover the
edge or to transit between other
floors. Mikasa presents an array of
matching underlays, skirting and
profiles to complement your floor.

BEADING





Beading & Quadrant of solid wood are available in a variety of colours to suit your floor. Suitable for all thicknesses of Mikasa floors, they are used when removing an existing skirting is not possible or if you do not want a very high skirting.

TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT	
Product Type			Solid Wood Beading
Wood Species			Oak, Walnut or Ash
Product Size			
Thickness		mm	16.7
Width		mm	16.7
Length		mm	2400
Moisture Content	EN 322	%	10% - 12%
Lacquer Type			Water Based Acrylic Lacquer and Stains
Lacquer Brand			Plantag, Germany
Lacquer Performance			
Cross Hatch & Removal	EN ISO 2409		0 - 1
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%
Stain Resistance	EN 438 - 2.26		5
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500
Scratch Resistance	EN438 - 2.25		Rating 2
Pencil Hardness	ASTM 3363		SH - H, GH- 5H
Impact Resistance	EN438 - 2.20		5N
Hamberger Plane	TC_01		15 N
Material Safety Data			
VOC Contain			Non-VOC Contain
PCP (pentachlorophenol)			PCP Free
Slip Test			NA
Fire Reaction			NA
Cigarette Burning			NA
Packaging information			
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximim 10 pieces
CartonBox			6 sided single face corrugated carton
Packs Cover			Plastic strap and PPE shrink film
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price

QUADRANT

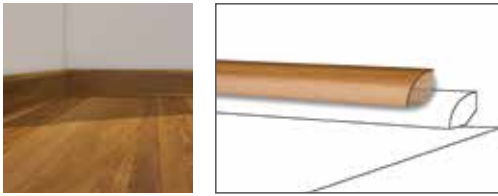


Beading & Quadrant of solid wood are available in a variety of colours to suit your floor. Suitable for all thicknesses of Mikasa floors, they are used when removing an existing skirting is not possible or if you do not want a very high skirting.


TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT	
Product Type			Solid wood beading
Wood Species			Oak, Walnut or Ash
Product Size			
Thickness		mm	20
Width		mm	20
Length		mm	2400
Moisture Content	EN 322	%	10% - 12%
Lacquer Type			Water Based Acrylic Lacquer and Stains
Lacquer Brand			Plantag, Germany
Lacquer Performance			
Cross Hatch & Removal	EN ISO 2409		0 - 1
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%
Stain Resistance	EN 438 - 2.26		5
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500
Scratch Resistance	EN438 - 2.25		Rating 2
Pencil Hardness	ASTM 3363		SH - H, GH- 5H
Impact Resistance	EN438 - 2.20		5N
Hamberger Plane	TC_01		15 N
Material Safety Data			
VOC Contain			Non-VOC Contain
PCP (pentachlorophenol)			PCP Free
Slip Test			NA
Fire Reaction			NA
Cigarette Burning			NA
Packaging information			
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximim 10 pieces
Carton Box			6 sided single face corrugated carton
Packs Cover			Plastic strap and PPE shrink film
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price

VENEERED SKIRTING

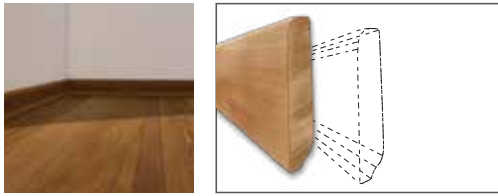

Skirting adds the final touch to your Mikasa floors. Available in matching veneers of many wood species, these profiles offer design and style. Complement all thicknesses of Mikasa floors.

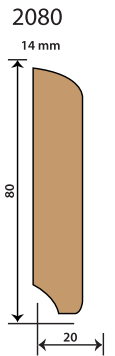



TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT	
Product Type			Solid Wood Skirting
Wood Species			Oak, Walnut or Ash
Product Size			
Thickness		mm	20
Width		mm	80
Length		mm	2400
Moisture Content	EN 322	%	10% - 12%
Lacquer Type			Water Based Acrylic Lacquer
Lacquer Brand			Plantag, Germany
Lacquer Performance			
Cross Hatch & Removal	EN ISO 2409		0 - 1
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%
Stain Resistance	EN 438 - 2.26		5
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500
Scratch Resistance	EN438 - 2.25		Rating 2
Pencil Hardness	ASTM 3363		SH - H, GH- 5H
Impact Resistance	EN438 - 2.20		5N
Hamberger Plane	TC_01		15 N
Material Safety Data			
VOC Contain			Non-VOC Contain
PCP (pentachlorophenol)			PCP Free
Slip Test			NA
Fire Reaction			NA
Cigarette Burning			NA
Packaging information			
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximim 10 pieces
Carton Box			6 sided single face corrugated carton
Packs Cover			Plastic strap and PPE shrink film
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price

REDUCER MOULDINGS




Used for making a smooth transition between floors of differing heights, for example, where wooden floors meet other flooring materials such as stone floors or fitted carpets.

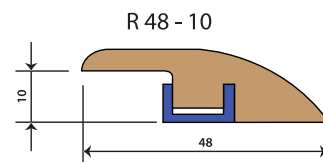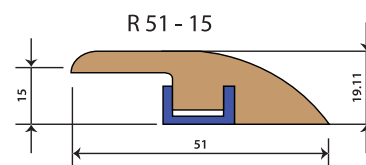



TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT		
Product Type			Solid Wood T-Profile	
Wood Species			Oak, Walnut or Ash	
Profile Holder			Plastic Rail/Guide	
Product Size				
Product type			R48-10	R51-15
Thickness		mm	14	19.11
Width		mm	48	51
Length		mm	2400	2400
Moisture Content	EN 322	%	10% - 12%	
Lacquer Type			Water Based Acrylic Lacquer and Stains	
Lacquer Brand			Plantag, Germany	
Lacquer Performance				
Cross Hatch & Removal	EN ISO 2409		0 - 1	
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%	
Stain Resistance	EN 438 - 2.26		5	
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500	
Scratch Resistance	EN438 - 2.25		Rating 2	
Pencil Hardness	ASTM 3363		SH - H, GH- 5H	
Impact Resistance	EN438 - 2.20		5N	
Hamberger Plane	TC_01		15 N	
Material Safety Data				
VOC Contain			Non-VOC Contain	
PCP (pentaclorophenol)			PCP Free	
Slip Test			NA	
Fire Reaction			NA	
Cigarette Burning			NA	
Packaging information				
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximim 10 pieces	
Carton Box			6 sided single face corrugated carton	
Packs Cover			Plastic strap and PPE shrink film	
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price	

T - MOULDINGS

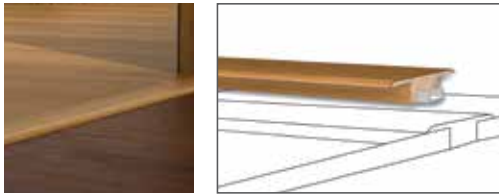


Used in the transition between floors of the same height where two rooms with identical flooring meet at a doorway. For example, hallways or bedrooms.

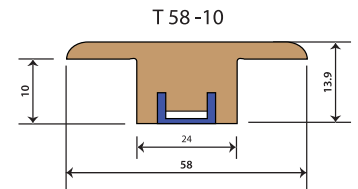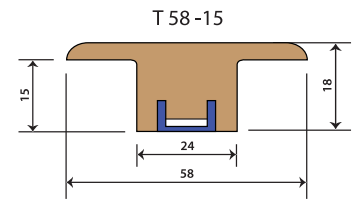

TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT		
Product Type			Solid Wood T-Profile	
Wood Species			Oak, Walnut or Ash	
Profile Holder			Plastic Rail/Guide	
Product Size				
Product Type			T58 -10	T58 -15
Thickness		mm	13.9	18
Width		mm	58	58
Length		mm	2400	2400
Moisture Content	EN 322	%	10% - 12%	
Lacquer Type			Water Based Acrylic Lacquer and Stains	
Lacquer Brand			Plantag, Germany	
Lacquer Performance				
Cross Hatch & Removal	EN ISO 2409		0 - 1	
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%	
Stain Resistance	EN 438 - 2.26		5	
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500	
Scratch Resistance	EN438 - 2.25		Rating 2	
Pencil Hardness	ASTM 3363		SH - H, GH- 5H	
Impact Resistance	EN438 - 2.20		5N	
Hamberger Plane	TC_01		15 N	
Material Safety Data				
VOC Contain			Non-VOC Contain	
PCP (pentaclorophenol)			PCP Free	
Slip Test			NA	
Fire Reaction			NA	
Cigarette Burning			NA	
Packaging information				
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximim 10 pieces	
Carton Box			6 sided single face corrugated carton	
Packs Cover			Plastic strap and PPE shrink film	
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price	

END MOULDINGS


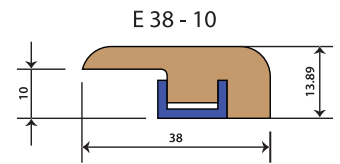


Useful when your floor meets an immovable object such as a door casing. Can also be used to cover the gap between the wooden floor and the wall or window.

TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT	
Product Type			Solid Wood End Profile
Wood Species			Oak, Walnut or Ash
Profile Holder			Plastic Rail/Guide
Product Size			
Product Type			E38-10
Thickness		mm	13.89
Width		mm	38
Length		mm	2400
Moisture Content	EN 322	%	10% - 12%
Lacquer Type			Water Based Acrylic Lacquer and Stains
Lacquer Brand			Plantag, Germany
Lacquer Performance			
Cross Hatch & Removal	EN ISO 2409		0 - 1
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%
Stain Resistance	EN 438 - 2.26		5
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500
Scratch Resistance	EN438 - 2.25		Rating 2
Pencil Hardness	ASTM 3363		SH - H, GH- 5H
Impact Resistance	EN438 - 2.20		5N
Hamberger Plane	TC_01		15 N
Material Safety Data			
VOC Contain			Non-VOC Contain
PCP (pentaclorophenol)			PCP Free
Slip Test			NA
Fire Reaction			NA
Cigarette Burning			NA
Packaging information			
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximim 10 pieces
Carton Box			6 sided single face corrugated carton
Packs Cover			Plastic strap and PPE shrink film
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price

STAIR NOSES

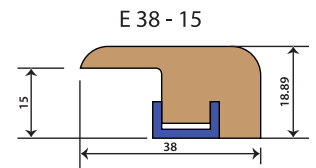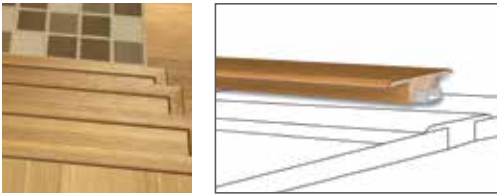

Used when your floor reaches a step down. Create a perfect end to every step in the staircase.


TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT	
Product Type			Solid Wood End Profile
Wood Species			Oak, Walnut or Ash
Profile Holder			Plastic Rail/Guide
Product Size			
Product Type			E38-15
Thickness		mm	18.89
Width		mm	38
Length		mm	2400
Moisture Content	EN 322	%	10% - 12%
Lacquer Type			Water Based Acrylic Lacquer and Stains
Lacquer Brand			Plantag, Germany
Lacquer Performance			
Cross Hatch & Removal	EN ISO 2409		0 - 1
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%
Stain Resistance	EN 438 - 2.26		5
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500
Scratch Resistance	EN438 - 2.25		Rating 2
Pencil Hardness	ASTM 3363		SH - H, GH- 5H
Impact Resistance	EN438 - 2.20		5N
Hamberger Plane	TC_01		15 N
Material Safety Data			
VOC Contain			Non-VOC contain
PCP (pentaclorophenol)			PCP free
Slip Test			NA
Fire Reaction			NA
Cigarette Burning			NA
Packaging information			
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximim 10 pieces
Carton Box			6 sided single face corrugated carton
Packs Cover			Plastic strap and PPE shrink film
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price

UNDERLAY **VAPROTECT**[®]



Mikasa **VAPROTECT**[®] - a perfect combination of PE Film and extruded foam - acts as moisture and sound barrier and an intermediate layer.

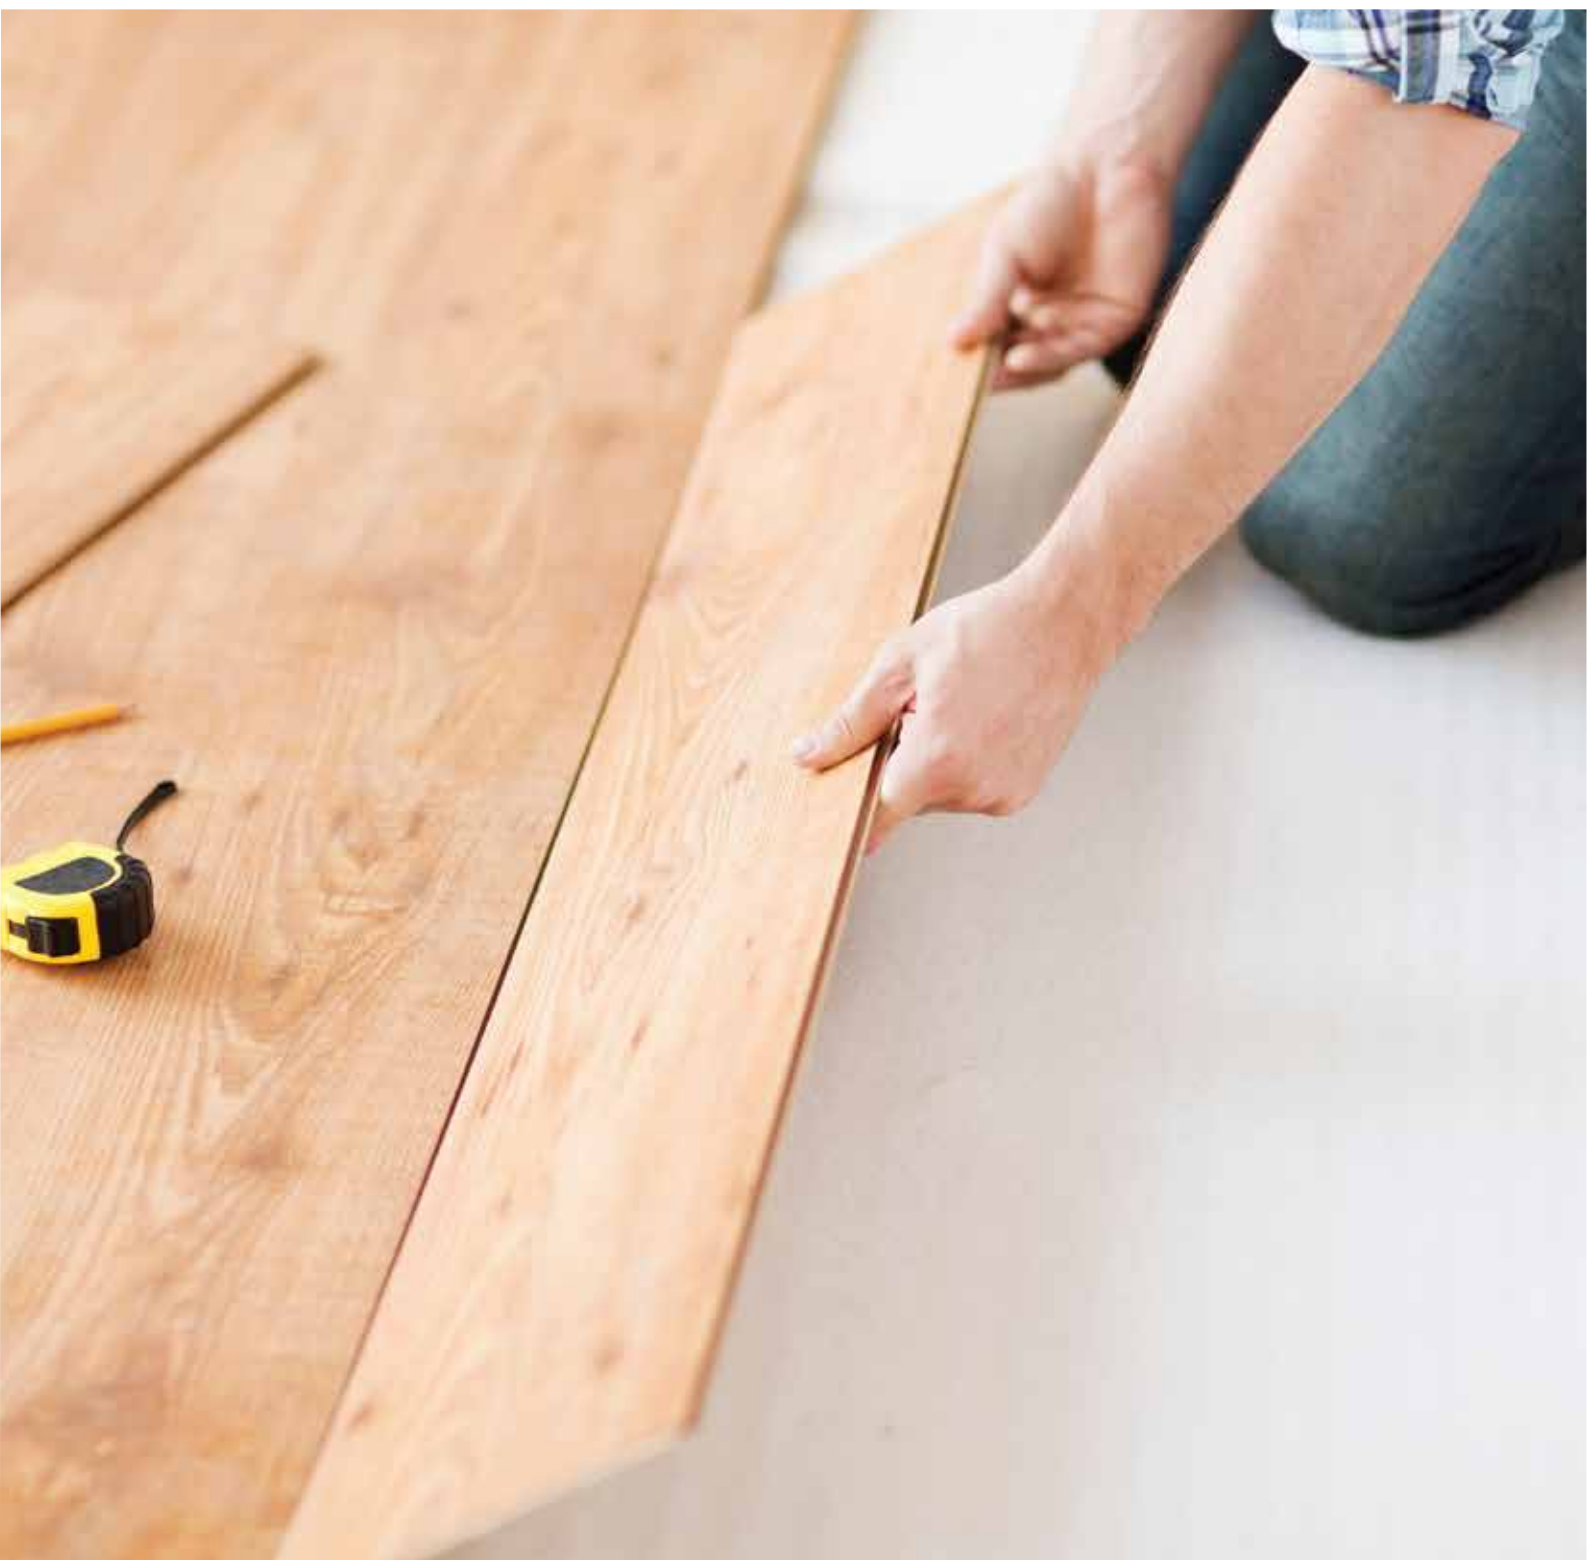



www.mikasafloors.com



1501 – 1505, Narain Manzil, 23, Barakhamba Road, New Delhi – 110001, India
Tel.: +91 11 4279 1399 E-mail: info@greenlamindustries.com

For a real experience with real wood, scan the QR code or **SMS <MIKASA> to 53030** to download the Mikasa brochure.
To know more, call on **Toll Free No.: 1800-833-0004** | www.mikasafloors.com | info@mikasafloors.com



To Download The Mikasa App



The best way to recycle this brochure is to give it to someone who needs it